



Solar Powered Chevron Moving Arrow Sign

Features :

- ☼ Powered by Multi-Crystalline Silicon (MCS) suitable for severe weather conditions
- ☼ Solar Charger Controller with high and low voltage protection
- ☼ Operating temperature range 0°C to 75°C
- ☼ High efficiency Solar Module designed for lifespan of 15 years
- ☼ High efficiency super flux (Piranha) amber LED Light
- ☼ Maintenance-Free Sealed Lead Acid (MFSLA) Battery for deep cycling regime with minimum 5-day autonomy
- ☼ Outdoor type IP56 casing
- ☼ Easy installation and minimum maintenance
- ☼ Applications : road corners, road construction sites and hazardous areas

CHEVRON 6



Move to left



To left & right



Move to right

CHEVRON 6 DUAL



Move to left



To left & right



Move to right




Highway

Benefits of Solar Powered System :

- ☼ Free energy from the Sun
- ☼ Environmental friendly (green energy)
- ☼ No electricity bill. No costly cabling. No smoke. No pollution
- ☼ No diesel generator. No fuel cost
- ☼ Low maintenance

Technical Specifications :

Model	CHEVRON WD44-12	CHEVRON WD44-24
Power	12Vdc	12Vdc
LED	Super Flux (Piranha) LED x 48 Strips	Super Flux (Piranha) LED X 96 Strips
Colour	Amber	Amber
Solar Panel	12V 80Watt MCS X 1 panel	12V 80Watt MCS X 2 panels
Backup Time	5-day autonomy with 12 hours daily operation	
Dimensions in mm	L=1765 x H=615 x D=60	L=1765 x H=615 x D=60
Weight	30kg	30kg
Solar Charge Controller	SUNCON1210 (option)	SUNCON1210 (option)
Wave length/typical/angle	590nm/1200mcd/70 degree view angle	
Battery (MFSLA)	12V 100Ah	12V 100Ah

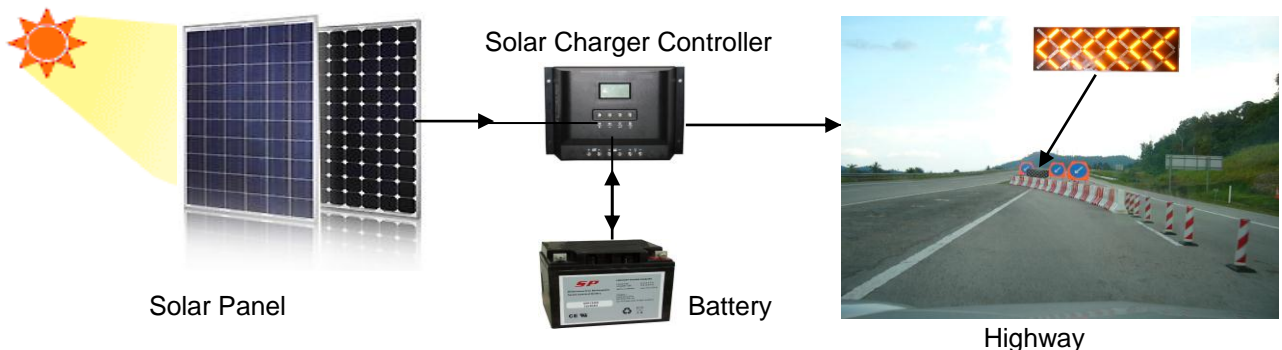

)